



Ultra - Battery Connection

The Ultra is supplied with the internal battery disconnected.

To connect the battery, the Ultra chassis needs to be removed from the pelican case. This is done by removing the eight screws on the front panel, as shown below.

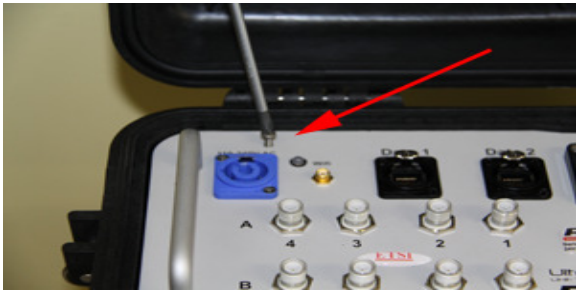

When the chassis is removed from the Pelican Case, there are nine screws that need to be undone to remove the bottom panel (closest to Reader "B")

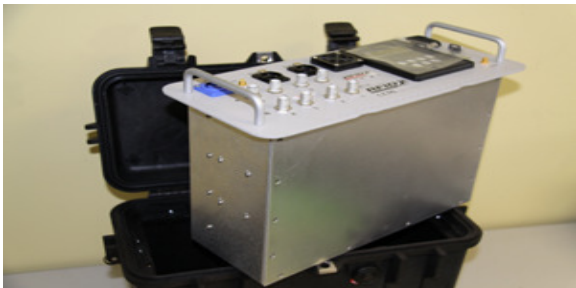

You will see two white 4-pin connectors between the battery charger and battery, these need to be connected.

Once the battery is connected, the bottom panel can be refastened by putting in the nine screws that were removed.

The Ultra chassis can now be put back in the pelican case and fastened. This is done by tightening the eight screws on the front panel, which was removed earlier on.

Please ensure that the battery is fully charged before using the Ultra.